National Transportation Safety Board

The NTSB Mission to Enhance Transportation Safety: Investigations, Recommendations, and Advocacy

Mark R. Rosekind, Ph.D.
Board Member

Aviation Department
Utah Valley University
February 26, 2014

Federal Agencies: Transportation

NTSB

FMCSA

FRA

NHTSA

PHMSA

DOT

MARAD

FTA

FHWA

FAA


NTSB


NTSB

1) determining the probable cause of transportation accidents

2) making recommendations to prevent their recurrence

All Modes

NTSB

PG&E/San Bruno Gas Pipeline Explosion

- 8 fatalities
- 10 serious injuries
- 48 minor injuries

- 108 homes affected
  - 38 destroyed
  - 17 sev - mod damage
  - 53 minor damage

NTSB

Independent Federal Agency: Created in 1967

- ~ 132,000 accident investigations
- 13,500+ safety recommendations
- ~ 2,500 organizations/recipients
- 82% acceptance rate

13,454 Safety Recommendations issued since 1967

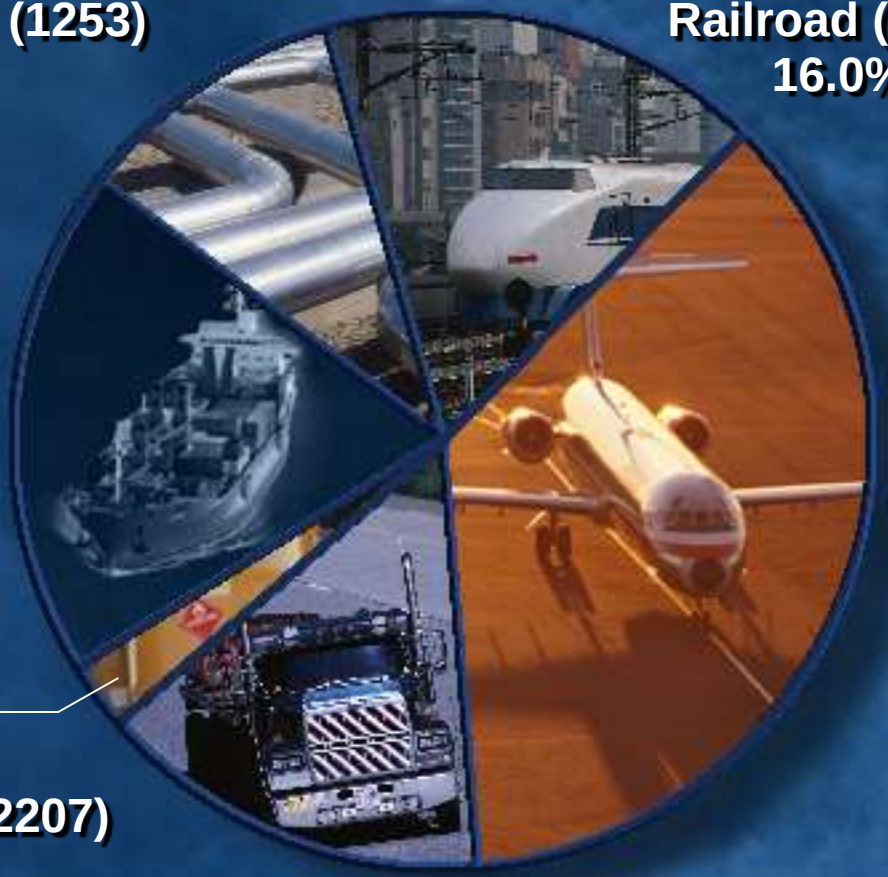

Pipeline (1253)
9.3%

Railroad (2156)
16.0%

Marine (2352)
17.5%

Aviation (5252)
39.0%

Intermodal (234)
1.7%

Highway (2207)
16.4%

Rev: July 1, 2011

“Swiss Cheese” Model (Reason)

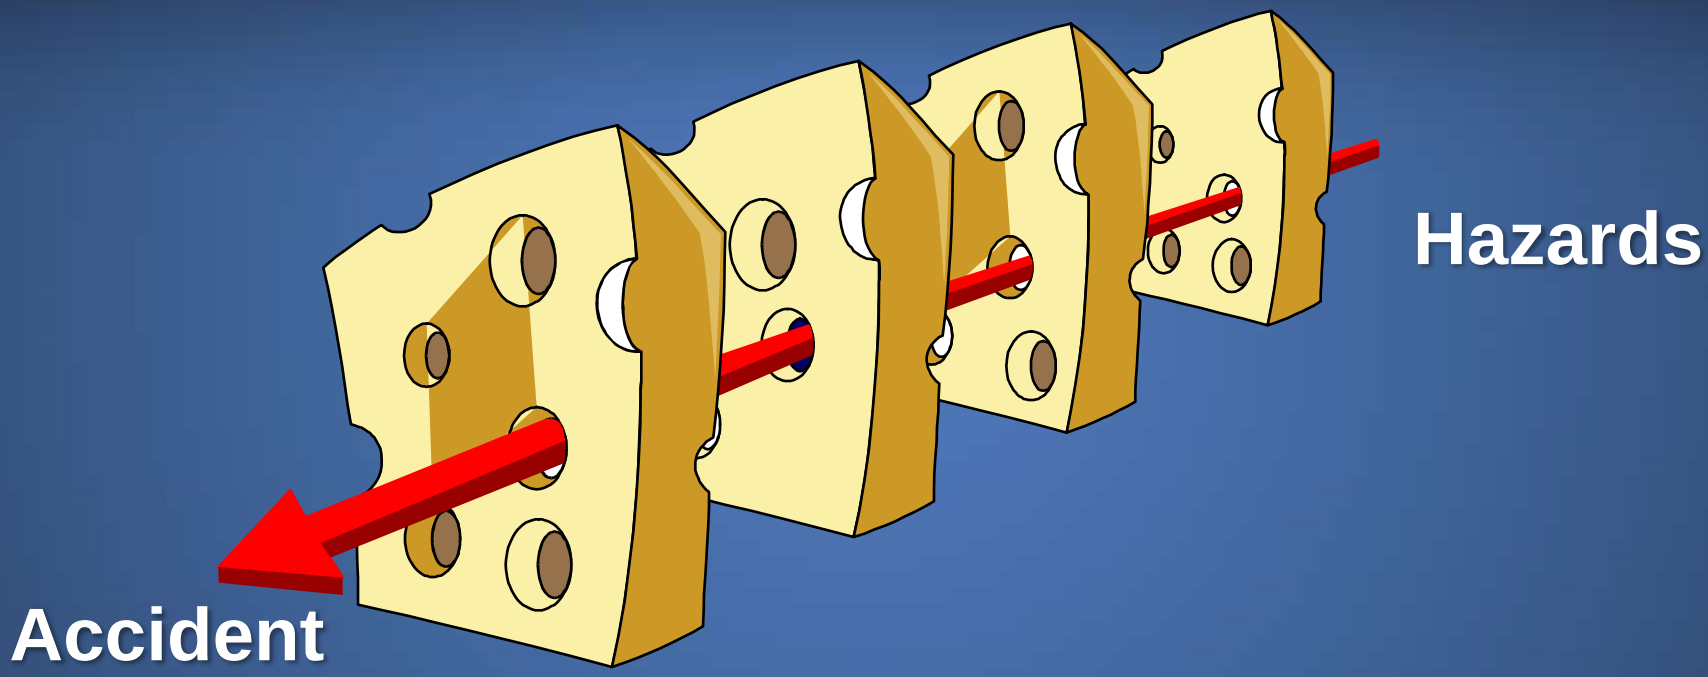

Successive layers of defenses, barriers, and safeguards

Asiana 214 (July 6, 2013)
San Francisco, CA (SFO)

NTSB

NTSB Go Team: 24/7/365

- Individual investigator
- Regional/limited team
- Major launch/Board Member

Key On-scene Events

Organizational Meeting

- Designate parties and party coordinators
- Establish and organize groups

Progress Meetings

- Summarize findings
- Info for briefings

Family Briefings

Press Briefings

NTSB

NTSB Investigative Process

On-scene Investigation

- Organizational Meeting
- Groups and Parties
- Progress meetings
- Media Briefings
- Press Releases

Preliminary Report

- Factual information

Public Hearing

- Fact finding
- Depositions
- Witnesses
- Docket

Board Meeting

- Docket
- Findings
- Conclusions
- Probable Cause
- Safety Recommendations

Final Report

Government in the Sunshine Act

NTSB

National Transportation Safety Board

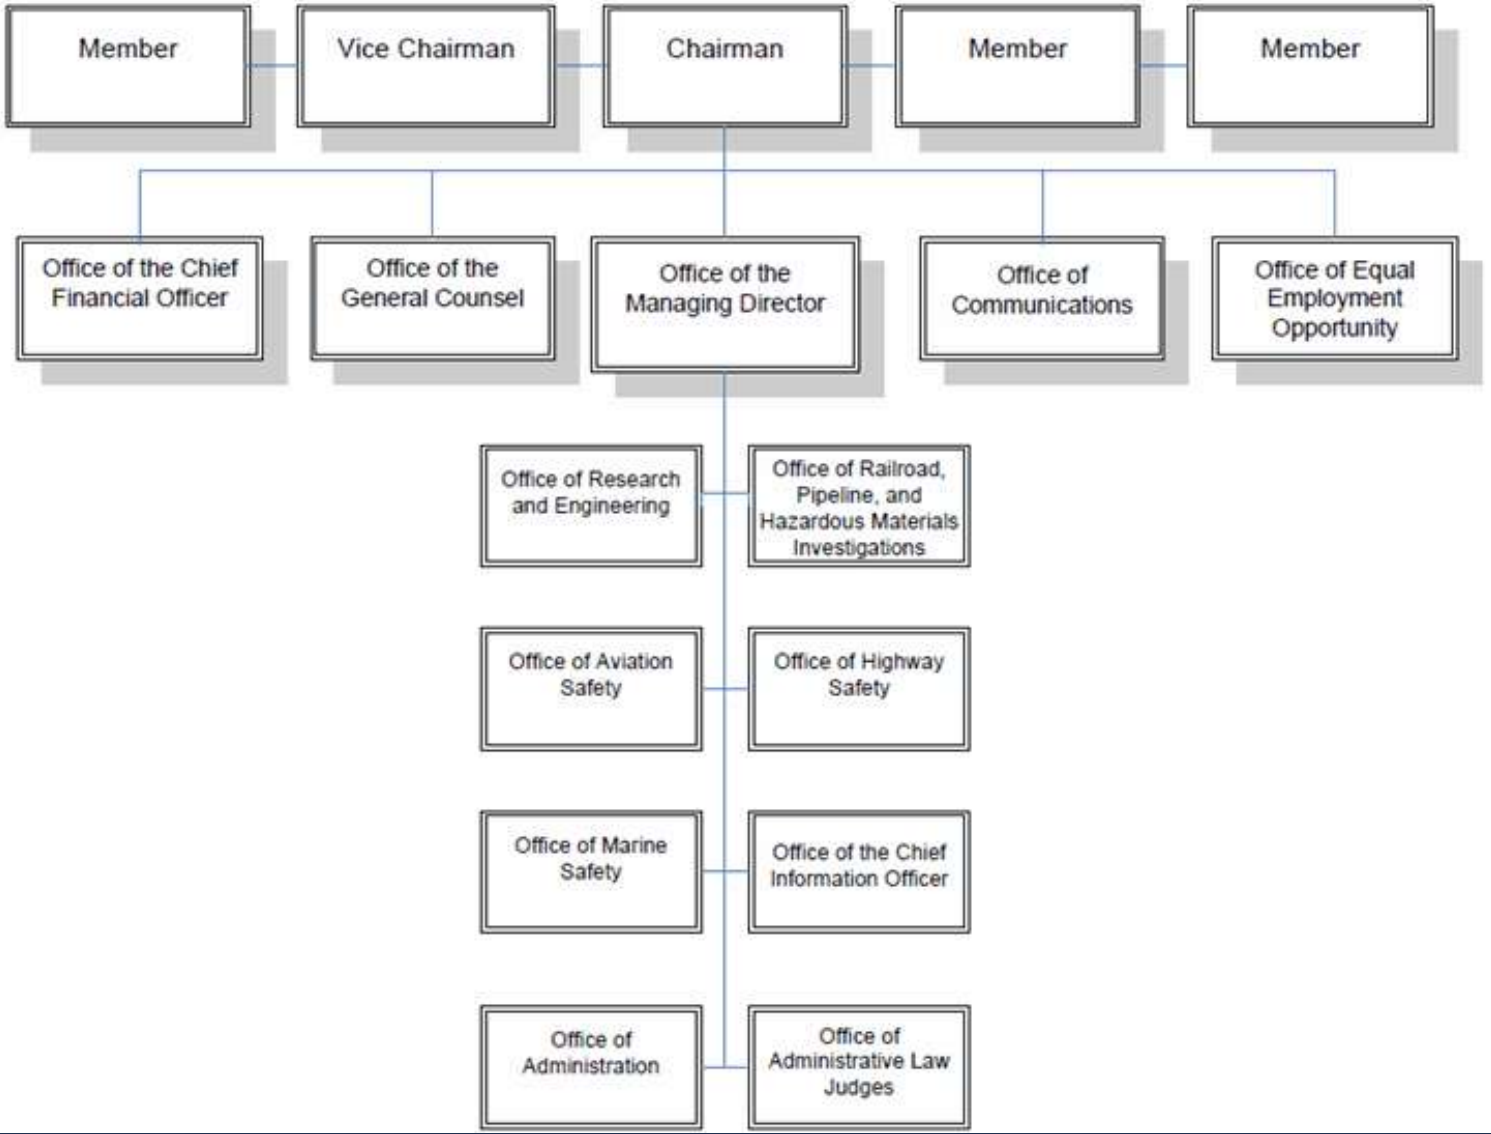

NTSB: The Board

- Five Members:
  - President nominates
  - Senate confirms

Mark Rosekind
Member

Chris Hart
Vice Chairman

Debbie Hersman
Chairman

Robert Sumwalt
Member

Earl Weener
Member

NTSB Characterized as:

‘moral compass and industry conscience’

NTSB Chairman Deborah A.P. Hersman

Most Wanted List

The Most Wanted List represents the NTSB's advocacy priorities. It is designed to increase awareness of, and support for, the most critical changes needed to reduce transportation accidents and save lives.

What is General Aviation?

NTSB

Pilots, Aircraft, and Flight Activity (Estimates)

- 55,000 new student pilot certificates issued (2011)
- 97,000 active flight instructors
- 617,000 active pilots
- 215,000 aircraft active in GA
  - 155,000 of those are fixed-wing, piston-powered
- 21.7 million hours flown in 2010
  - 10.4 million hours were personal/business flights

Geographic Distribution of Accidents

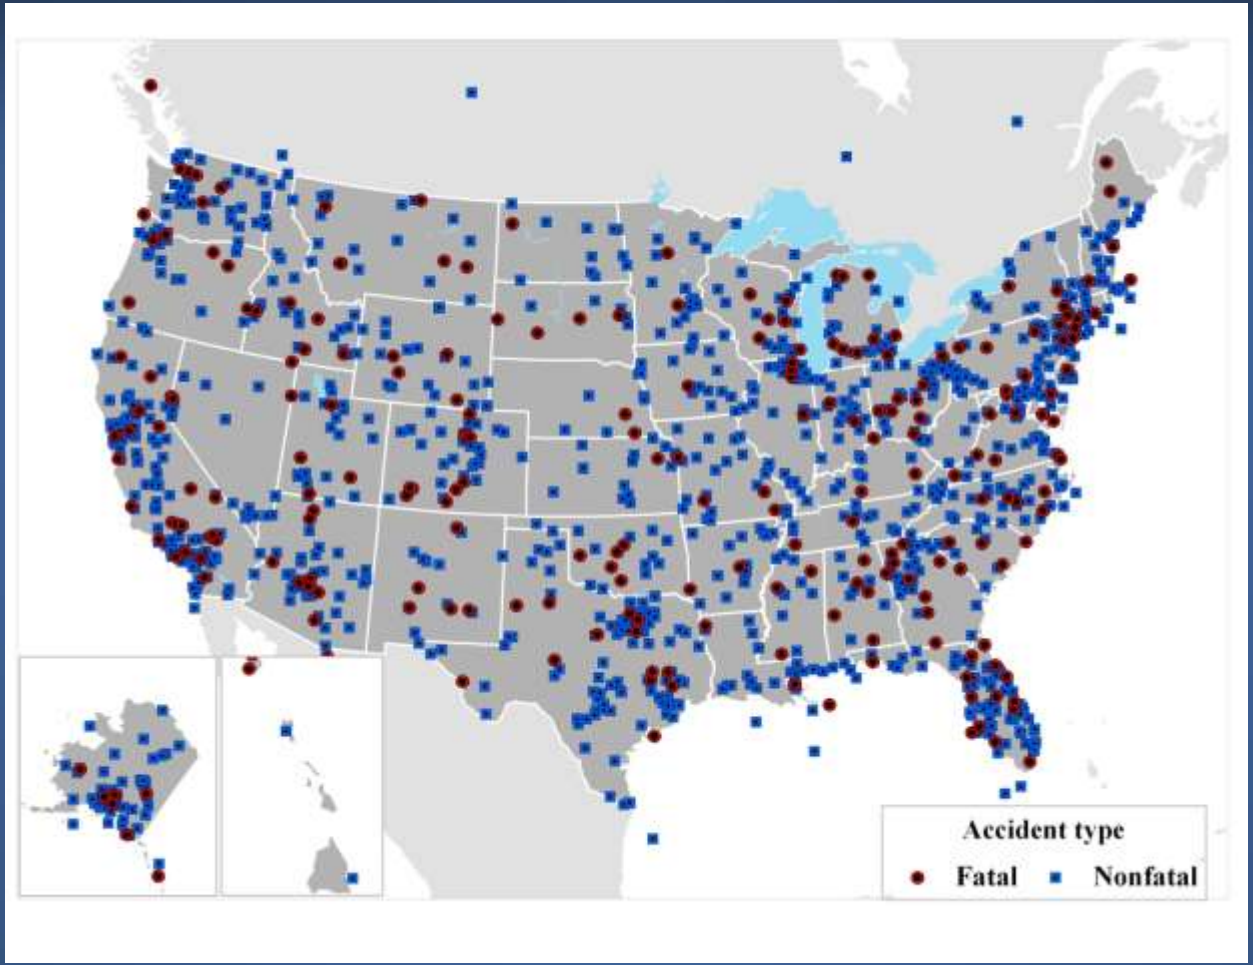

Personal Flying Defining Events

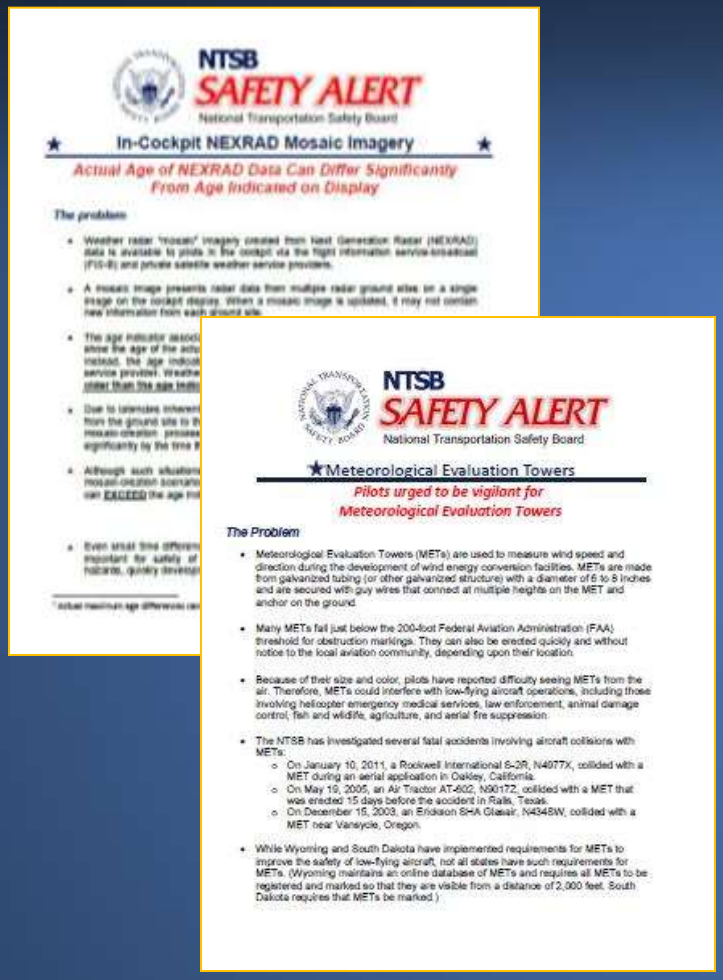

NTSB
SAFETY ALERT
National Transportation Safety Board

★ In-Cockpit NEXRAD Mosaic Imagery ★

Actual Age of NEXRAD Data Can Differ Significantly From Age Indicated on Display

The problem

- Weather radar "mosaic" imagery created from Next Generation Radar (NEXRAD) data is available to pilots in the cockpit via the flight information service-broadcast (FIS-B) and private satellite weather service providers.
- A mosaic image presents radar data from multiple radar ground sites on a single image on the cockpit display. When a mosaic image is updated, it may not contain new information from each ground site.
- The age indicator associ... shows the age of the actu... Instead, the age indicat... service provider. Weathe... older than the age indic...
- Due to latencies inherent... from the ground site to th... mosaic-creation process ... significantly by the time it...
- Although such situations ... mosaic-creation scenario... can EXCEED the age ind...
- Even small time differen... important for safety of ... hazards, quickly develop...

NTSB
SAFETY ALERT
National Transportation Safety Board

★Meteorological Evaluation Towers

Pilots urged to be vigilant for Meteorological Evaluation Towers

The Problem

- Meteorological Evaluation Towers (METs) are used to measure wind speed and direction during the development of wind energy conversion facilities. METs are made from galvanized tubing (or other galvanized structure) with a diameter of 6 to 8 inches and are secured with guy wires that connect at multiple heights on the MET and anchor on the ground.
- Many METs fall just below the 200-foot Federal Aviation Administration (FAA) threshold for obstruction markings. They can also be erected quickly and without notice to the local aviation community, depending upon their location.
- Because of their size and color, pilots have reported difficulty seeing METs from the air. Therefore, METs could interfere with low-flying aircraft operations, including those involving helicopter emergency medical services, law enforcement, animal damage control, fish and wildlife, agriculture, and aerial fire suppression.
- The NTSB has investigated several fatal accidents involving aircraft collisions with METs:
  - On January 10, 2011, a Rockwell International S-2R, N4977X, collided with a MET during an aerial application in Oakley, California.
  - On May 19, 2005, an Air Tractor AT-602, N90172, collided with a MET that was erected 15 days before the accident in Ralls, Texas.
  - On December 15, 2003, an Erickson S-HA Glasair, N434BW, collided with a MET near Vansycle, Oregon.
- While Wyoming and South Dakota have implemented requirements for METs to improve the safety of low-flying aircraft, not all states have such requirements for METs. (Wyoming maintains an online database of METs and requires all METs to be registered and marked so that they are visible from a distance of 2,000 feet. South Dakota requires that METs be marked.)

General Aviation (GA) Safety Alerts

March 12, 2013

NTSB

GA Safety Alerts

- Define a GA safety problem
- Provide statistics on the problem
- Provide examples of accidents
- Provide ways to prevent accidents

GA Safety Alert Topics

- Aerodynamic stalls at low altitude
- Reduced-visual references
- Aircraft mechanical problems
- Pilots' risk management
- Mechanics' risk management

GA Safety Alert:
"Prevent Aerodynamic Stalls at Low Altitude"

Stall/Spin After Takeoff Accident

Chris Shaver - IIC

Stall in Airport Traffic Pattern

Jennifer Rodi - IIC

NTSB

Aerodynamic Stall During Maneuvers

Craig Hatch - IIC

NTSB

What can pilots do?

- Seek training to fully understand stall phenomenon and AOA concepts
- Remember that a stall can occur at any airspeed, in any attitude, and at any engine power setting

What can pilots do?

- Remember that maneuvering loads, other factors increase stall speed
- Reduce AOA at first indication of stall – it's the most important immediate response

What can pilots do?

- Manage distractions when maneuvering at low altitude
- Resist temptation to “show off”
- Understand that stall characteristics can differ substantially between airplanes

GA Safety Alert Topics

- "Armed" for Safety: Emergency Locator Transmitters (SA-030)
- Engine Power Loss Due to Carburetor Icing (SA-029)
- Proper Use of Fiber or Nylon Self-Locking Nuts (SA-028)
- Check Your Restraints (SA-027)
- All Secure, All Clear (SA-026)
- Avoid Nonoperational Use of Portable Electronic Devices (PEDs) Before and During Flight (SA-025)

Go! Flight 1002

- early starts, multiple segment days, sleep apnea

NTSB

Honorable John K. Lauber:

No Accident ≠
Safe Operation

Owatonna, MN (July 31, 2008)

8 fatalities

NTSB

Owatonna Crew Fatigue Factors

- acute sleep loss (Capt/FO)
- cumulative sleep debt (FO)
- early start time (Capt/FO)
- excessive sleep need (Capt)
- insomnia (FO)
- self-medicate/prescription sleep med (FO)

Probable Cause/Contributing Factors

"Contributing to the accident were . . . (2) fatigue, which likely impaired both pilots' performance; . . ."

GA Accident: GULF OF MEXICO (February 17, 1994)

THE PILOT FELL ASLEEP WHILE ENROUTE FROM SPRINGFIELD, KY TO CROSSVILLE, TN WHEN HE AWOKE 5 HOURS LATER HE FOUND THAT HE WAS OVER THE GULF OF MEXICO, 210 MILES SOUTH OF PANAMA CITY, FL, AND HAD ONLY 20 MINUTES OF FUEL REMAING. HE DECLARED MAYDAY ON 121.5 AND WAS ASSISTED BY COAST GUARD AND AIR FORCE AIRCRAFT. THEY DIRECTED HIM TO THE NEAREST AIRPORT, ST. PETERSBURG, FL WHILE ENROUTE TO THE AIRPORT THE ENGINES QUIT DUE TO FUEL EXHAUSTION AND THE AIRCRAFT WAS DITCHED, 70 MILES WEST OF ST. PETERSBURG. HE WAS RESCUED BY A COAST GUARD HELICOPTER.

GA Accident: GULF OF MEXICO (February 17, 1994)

- The National Transportation Safety Board determines the probable cause(s) of this accident to be:

  THE PILOT'S PHYSIOLOGICAL CONDITION (FAILURE TO REMAIN AWAKE) RESULTING IN EXTENDED FLIGHT OVER WATER FOLLOWED BY FUEL EXHAUSTION, TOTAL LOSS OF ENGINE POWER, AND DITCHING BEFORE RETURNING TO LAND.

Challenges of a 24/7 Society

Four Fatigue Factors +

- Sleep loss
- Continuous hours of wakefulness
- Circadian/time of day
- Sleep disorders
- Other considerations

Fatigue Risks

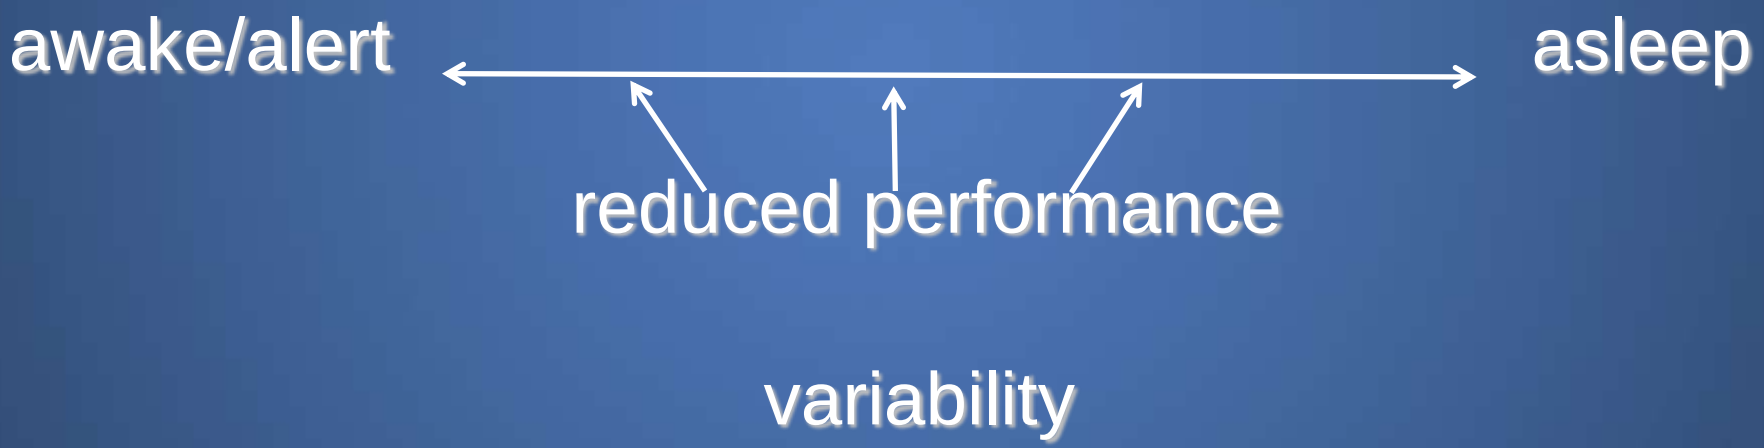

Fatigue Risks

- degraded 20 – 50%+:

  - reaction time
  - memory
  - communication
  - situational awareness
  - judgment
  - attention
  - mood

- increased:

  - irritability
  - apathy
  - attentional lapses
  - microsleeps

Fatigue and Reaction Times

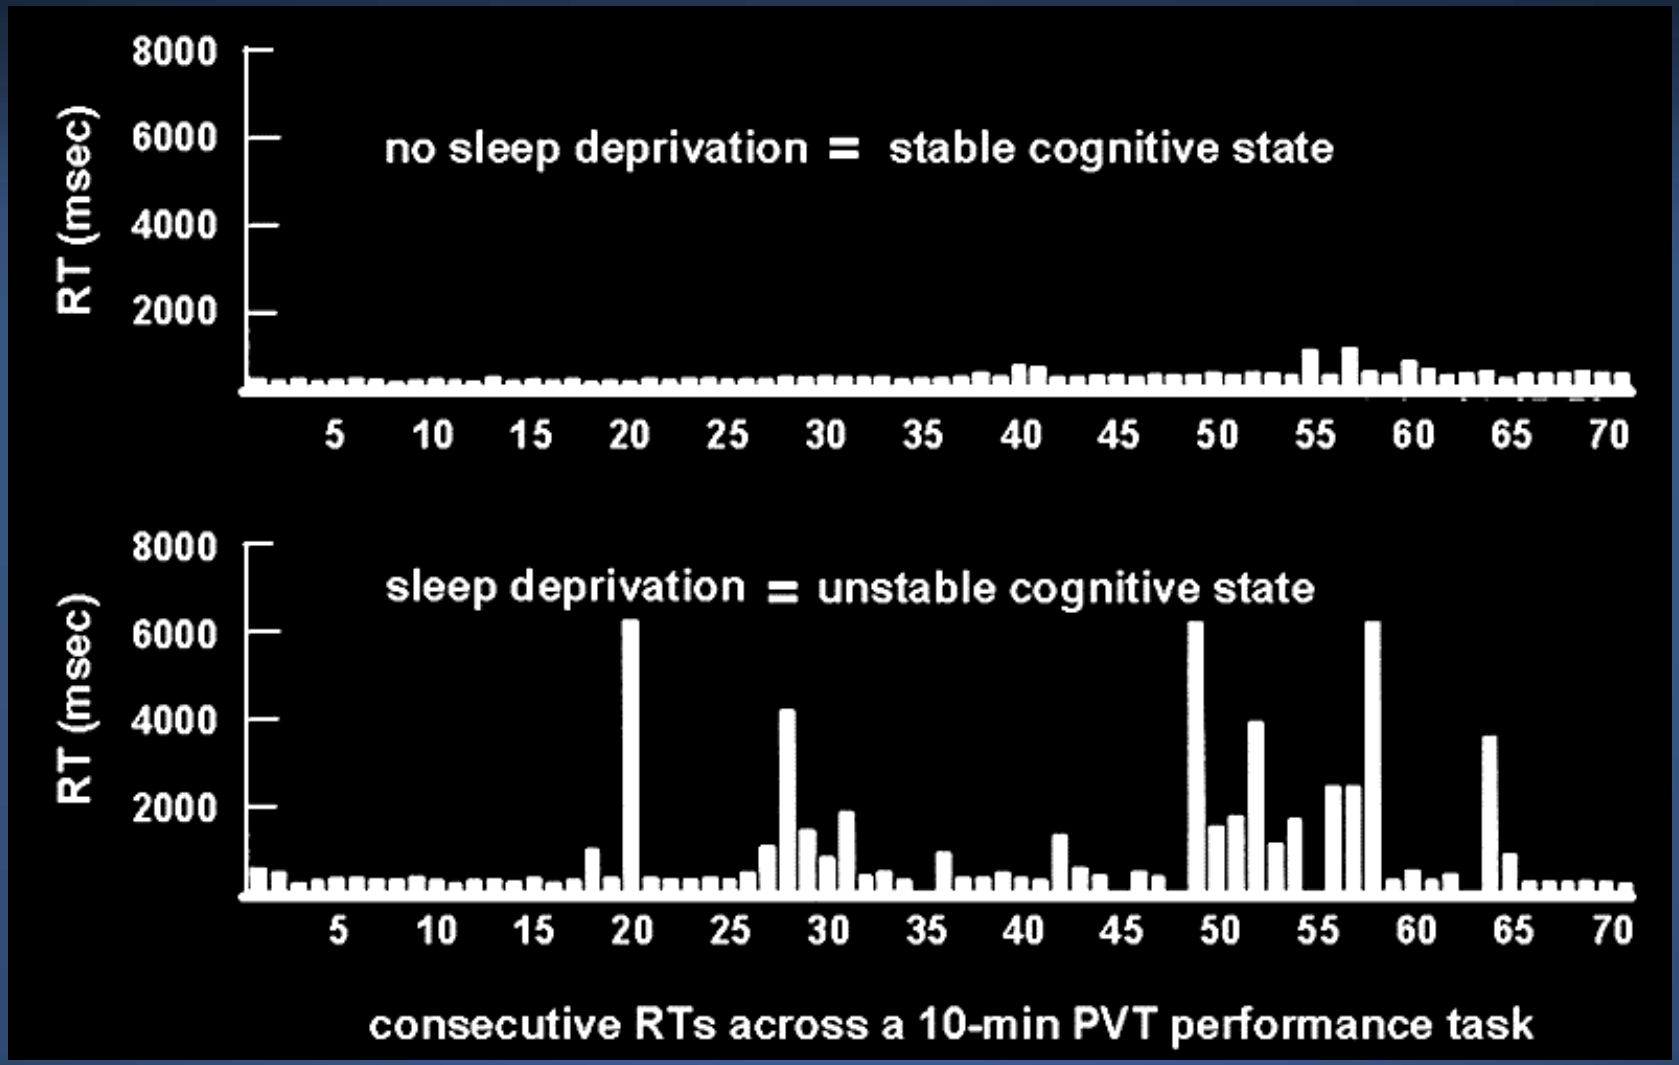

Doran SM, Van Dongen HP, Dinges DF. Sustained attention performance during sleep deprivation: evidence of state instability. *Archives of Italian Biology: Neuroscience* 2001;139:253-267.

NTSB

Alertness Reports Often Inaccurate

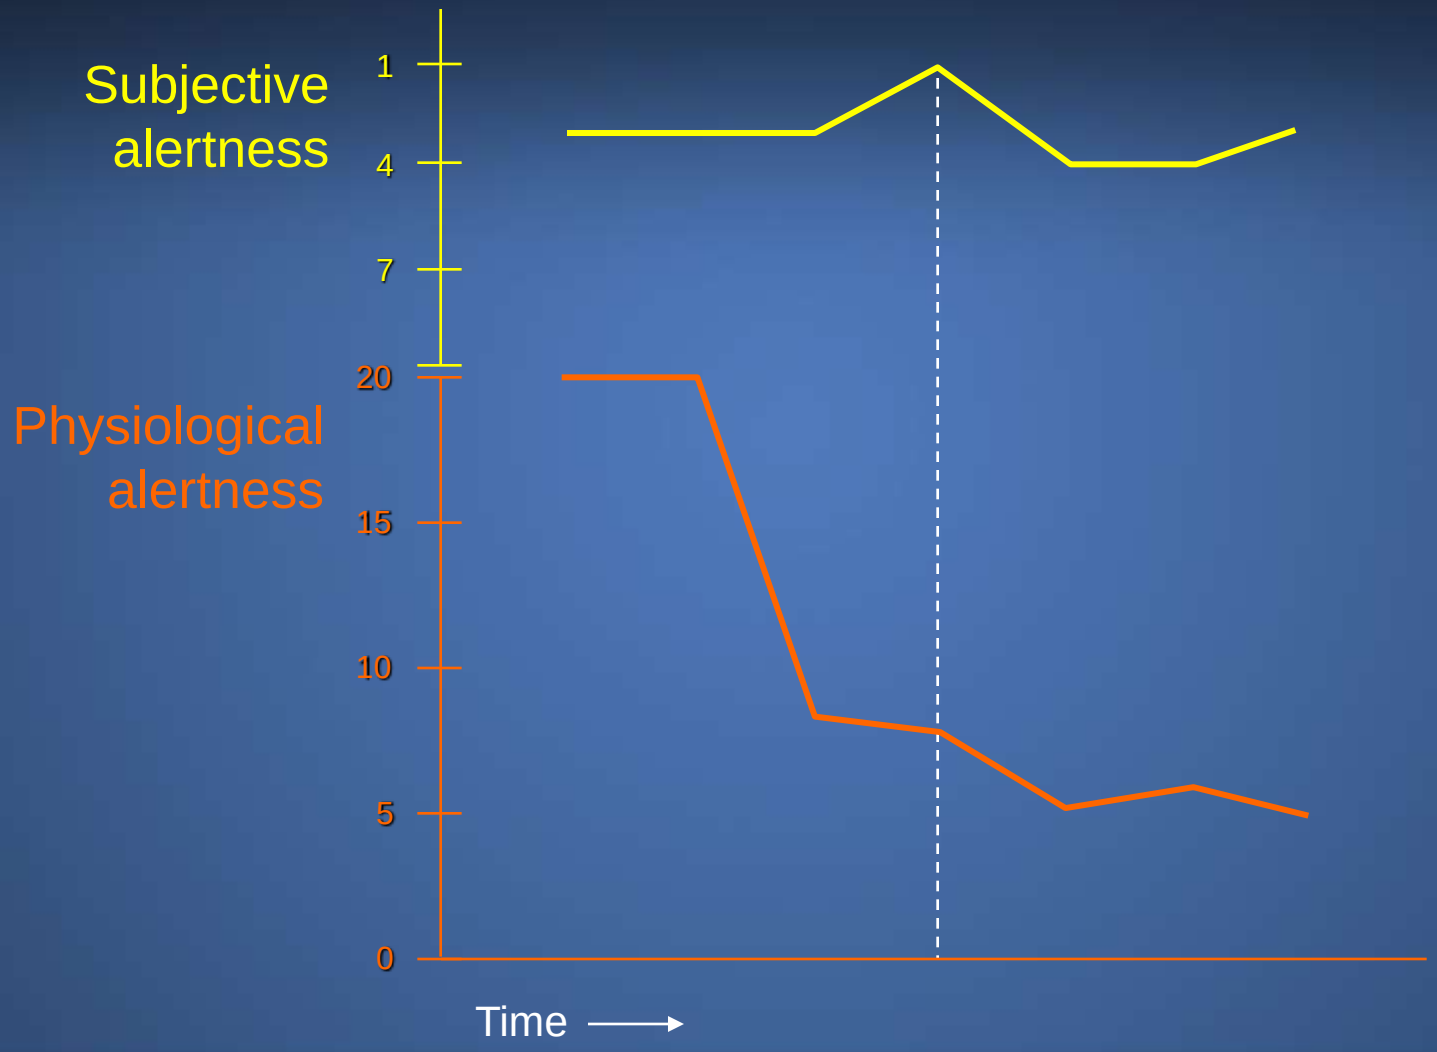

Adapted from Sasaki et al., 1986

NTSB

www.ntsb.gov

National Transportation Safety Board